

# Cranberry

*Experimental Weatherbox Platform*

Kim Pee Castro  
Brandon Amano

Critical Design Review (CDR) Presentation  
November 21<sup>st</sup>, 2015  
Dr. Anthony Kuh



Smart Campus Energy Lab (SCEL)

Renewable Energy & Island Sustainability (REIS)

University of Hawaii at Manoa



# Presentation Overview




## ***Cranberry* - Weatherbox Platform**

Weather Sensor Module - Measures barometric pressure, humidity, temperature, and luminosity.

- Overall Hardware Block Diagram
- Team Progress Overview
- Power Module Test Data
- Bill of Materials (BOM) and Power Budget
- Remaining Tasks and End-Goals



# Hardware Block Diagram

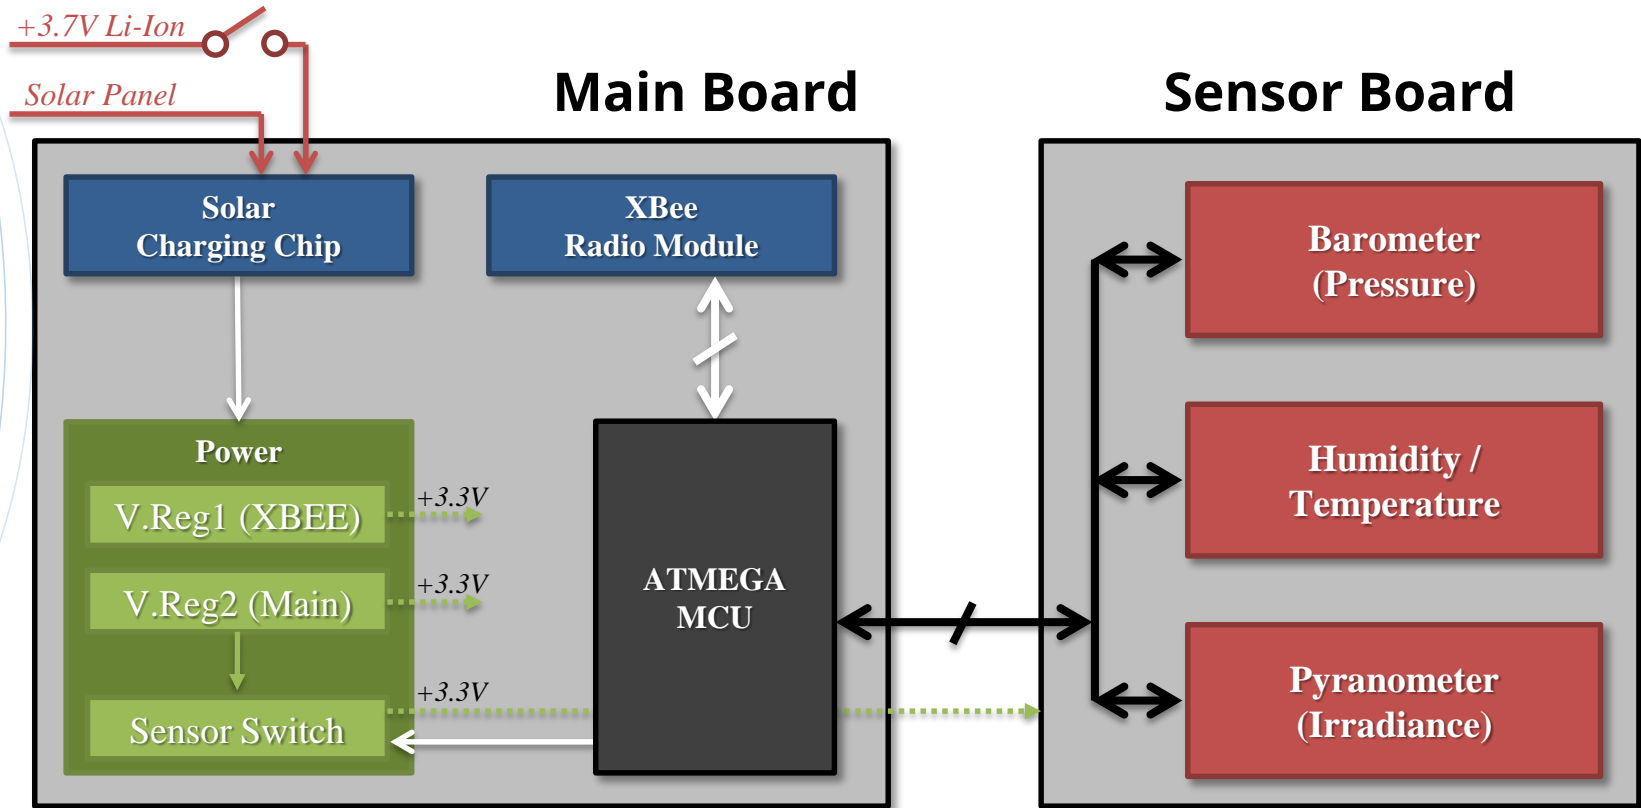

# EAGLE Library and Schematic Update




## EAGLE Part Library


- All main components completed
- Remaining miscellaneous components:
  - Connectors (JST, Pin Headers, Barrel)
  - Oscillator, Polarized Capacitor, Schottky Diode

## EAGLE Schematic

- Incrementally implemented each module
- Schematic redone with standard conventions, including proper labeling and documentation
- Corrections made based on errors found

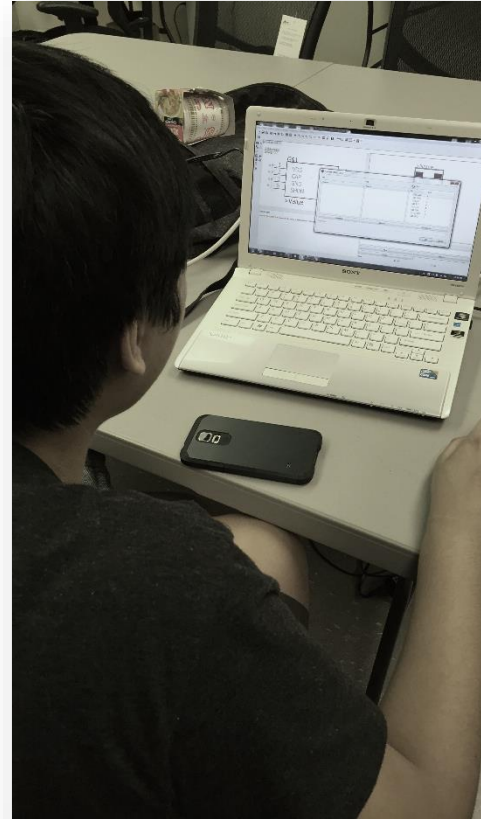

# Parts Library and Schematic Update

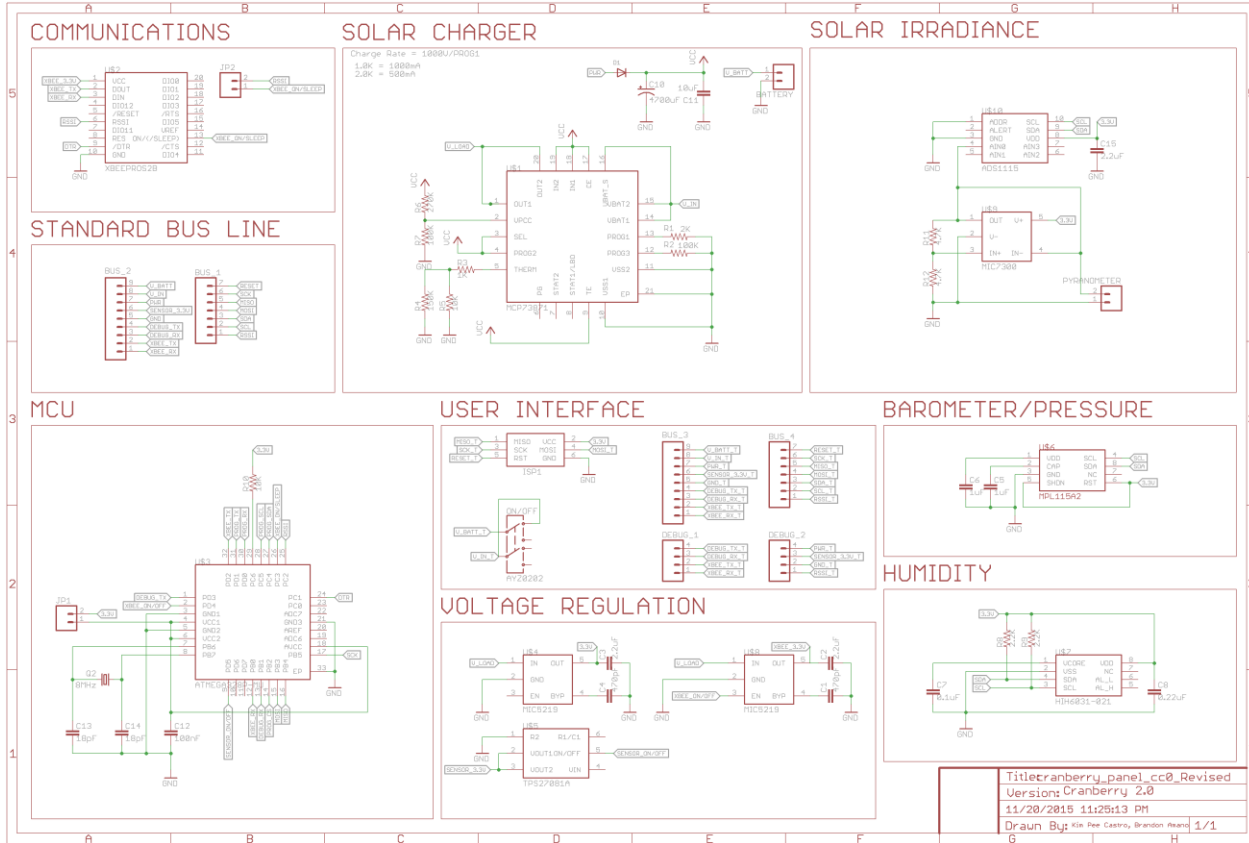

Title: cranberry\_panel\_cc0\_Revised  
 Version: Cranberry 2.0  
 11/20/2015 11:25:13 PM  
 Drawn By: Kie Pee Castro, Brandon Meant 1/1

# Cranberry Board V1.0 Update



## Power Module - Charging Chip and V. Regs.

### Obstacles Encountered:


- Incorrect sensor switch pin connections.
- Incorrect resistors for *Battery Temp. Monitor* THERM pin.
- Discrepancy between charging rates and PROG1 resistors
- Mixture of discrete component packages (0805 vs. 0603)

### Cranberry Board #1

- Incorrect voltages; Does not charge battery

### Cranberry Board #2


- Proper voltages/currents obtained
- Board is powered and Li-Po battery charges

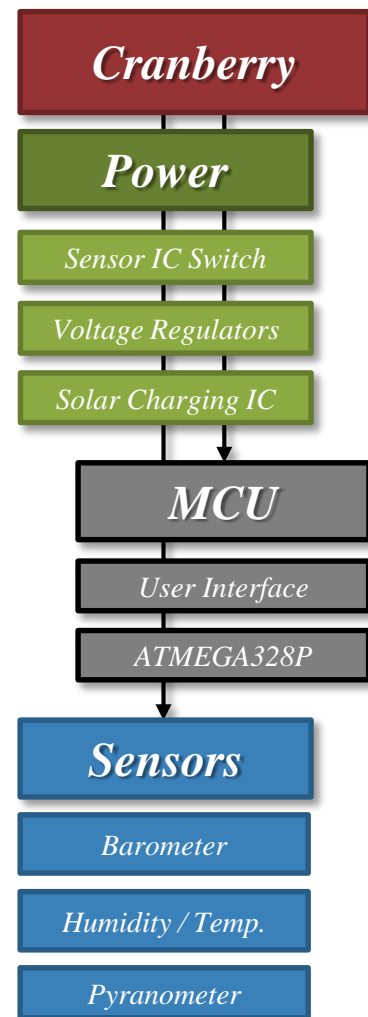

# Verification of Power Module



| Parameter                       |                    | Cranberry #1<br>(Non-Working Board) | Cranberry #2<br>(Working Board) | Dragon Fruit<br>(Working Board) | Adafruit Breakout<br>(500mA Charging) |
|---------------------------------|--------------------|-------------------------------------|---------------------------------|---------------------------------|---------------------------------------|
| Without Battery<br>Without Load | $V_{Source}$       | 6.00V                               | 6.00V                           | 6.01V                           | 6.00V                                 |
|                                 | $V_{Batt}$         | 4.06V                               | 4.32V                           | 4.34V                           | 4.30V                                 |
|                                 | $V_{Load}$         | 3.98V                               | 5.88V                           | 5.88V                           | 6.01V                                 |
|                                 | $V_{3.3,Main}$     | 3.569V                              | 3.292V                          | 3.304V                          |                                       |
|                                 | $V_{3.3,Xbee}$     | 3.569V                              |                                 |                                 |                                       |
| With Battery<br>Without Load    | $V_{Source}$       | 6.00V                               | 5.68V                           | 5.67V                           | 5.69V                                 |
|                                 | $I_{Source}$       | 0.01A                               | 0.49A                           | 0.49A                           | 0.50A                                 |
|                                 | $V_{Batt}$         | 3.74V                               | 3.82V                           | 3.837V                          | 3.81V                                 |
|                                 | $V_{Load}$         | 4.16V                               | 5.37V                           | 5.36V                           | 5.68V                                 |
|                                 | $V_{3.3,Main}$     | 3.298V                              | 3.294V                          | 3.310V                          |                                       |
|                                 | $V_{3.3,XBee}$     | 3.290V                              |                                 |                                 |                                       |
| With Battery<br>With LED Load   | $V_{Source}$       | 6.01V                               | 5.69V                           | 5.66V                           |                                       |
|                                 | $I_{Source}$       | 0.00A                               | 0.49A                           | 0.49A                           |                                       |
|                                 | $V_{Batt}$         | 3.74V                               | 3.83V                           | 3.83V                           |                                       |
|                                 | $V_{Load}$         | 5.84V                               | 5.37V                           | 5.35V                           |                                       |
|                                 | $V_{3.3,Main}$     | 3.299V                              | 3.294V                          | 3.307V                          |                                       |
|                                 | $I_{3.3,Main,LED}$ | 1.51mA                              | 1.50mA                          | 1.51mA                          |                                       |
|                                 | $V_{3.3,XBee}$     | 3.293V                              |                                 |                                 |                                       |

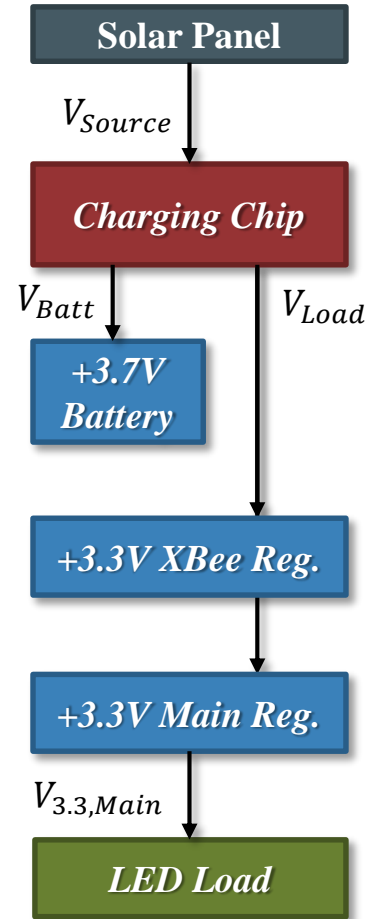

# Bill of Materials (BOM)




## Resembles SCEL Inventory Sheet

- Contains quantity, part description, package, mounting type, part value, manufacturer, distributor, and unit cost.
- References the EAGLE name and description.

## Cranberry Cost: ~\$303

(Excluding PCB, Housing, and Batteries)

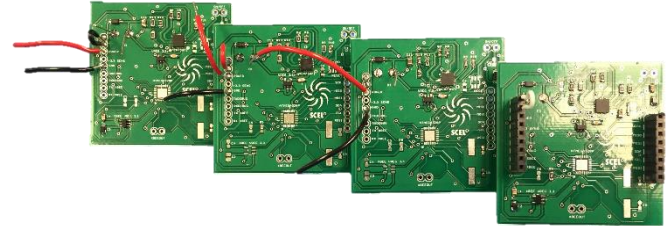

## Includes:


- **IC Components**  
(V.Reg, MCU, Sensors)
- **Passive Components**  
(Resistors, Capacitors, Diodes)
- **Misc. Components**  
(Solar Panel, Battery, Switches)
- **Connectors**  
(JST, Pin Headers, Barrel)



# Bill of Materials (BOM)

| Cranberry Bill of Materials (VI) (BOM) |          |                            |                                     |              |   |               |                 |            |                            |                       |             |                     |           |           |
|--|----------|----------------------------|-------------------------------------|--------------|---|---------------|-----------------|------------|----------------------------|-----------------------|-------------|---------------------|-----------|-----------|
| Part #                                 | Quantity | EAGLE Name                 | EAGLE Description                   | Part Type    | Part Description                                      | Mounting Type | Part Package    | Part Value | Manufacturer               | Manufacturer P/N      | Distributor | Distributor P/N     | Unit Cost | Sub-Cost  |
| 1                                      | 2        | VREG3.3_MAIN; VREG3.3_XBEE | Main Board and XBEE V.Reg           | V. Regulator | IC REG LDO 3.3V 0.5A SOT23-5                          | SMD           | SOT23-5         | 3.3V       | Microchip Tech.            | MIC5219-3.3YM5-TR     | Digi-Key    | 576-1281-1-ND       | \$ 0.89   | \$ 1.78   |
| 2                                      |          |                            |                                     |              |   |               |                 |            |                            |                       |             |                     | \$ -      | \$ -      |
| 3                                      | 1        | C5                         | ATMEGA RESET Cap                    | Capacitor    | CAP CER 10000PF 50V X7R 0805                          | SMD           | 0805            | 10nF       | Yageo                      | CC0805KRX7R9BB103     | Digi-Key    | 311-1136-1-ND       | \$ 0.10   | \$ 0.10   |
| 4                                      | 1        | C3                         | IC Switch Decoupling Cap            | Capacitor    | CAP CER 1UF 10V X7R 0805                              | SMD           | 0805            | 1uF        | Yageo                      | CC0805KXX7R6BB105     | Digi-Key    | 311-1458-1-ND       | \$ 0.10   | \$ 0.10   |
| 5                                      | 2        | C4, C6                     | V. Reg Decoupling Caps              | Capacitor    | CAP CER 470PF 100V X7R 0805                           | SMD           | 0805            | 470pF      | Samsung Electro-Mech.      | CL21B471KCANNNC       | Digi-Key    | 1276-2516-1-ND      | \$ 0.12   | \$ 0.24   |
| 6                                      | 2        | C2, C12                    | V.Reg Polanzed Decoupling Caps      | Capacitor    | CAP TANT 2.2UF 6.3V 20% 0805                          | SMD           | 0805            | 2.2uF      | Rohm Semiconductor         | TCP0725M8R            | Digi-Key    | 511-1439-6-ND       | \$ 0.69   | \$ 1.38   |
| 7                                      | 1        | C1                         | ATMEGA Decoupling Cap               | Capacitor    | CAP CER 0.1UF 50V Y5V 0805                            | SMD           | 0805            | 100nF      | Yageo                      | CC0805ZRY5V9BB104     | Digi-Key    | 311-1361-1-ND       | \$ 0.10   | \$ 0.10   |
| 8                                      | 2        | C7, C8                     | Crystal Oscillator Decoupling Caps  | Capacitor    | CAP CER 18PF 50V NP0 0805                             | SMD           | 0805            | 18pF       | Johanson Dielectrics       | 500R15N180V4T         | Digi-Key    | 709-1171-1-ND       | \$ 0.10   | \$ 0.20   |
| 9                                      | 1        | C10                        | Solar Charger Decoupling Cap        | Capacitor    | CAP ALUM 4700UF 20% 10V RADIAL                        | PTH           | 0.197" (5.0mm)  | 4700uF     | Panasonic Electro-Comp.    | ECA-1AM472            | Digi-Key    | P5130-ND            | \$ 0.90   | \$ 0.90   |
| 10                                     | 1        | C11                        | Solar Charger Decoupling Cap        | Capacitor    | CAP CER 10UF 20V X6S 0805                             | SMD           | 0805            | 10uF       | Murata Electronics NA      | GRM21BC81D106KE51L    | Digi-Key    | 490-10500-6-ND      | \$ 0.24   | \$ 0.24   |
| 11                                     | 1        | C1                         | ATMEGA Decoupling Cap               | Capacitor    | CAP CER 0.1UF 50V Y5V 0805                            | SMD           | 0805            | 0.1uF      | Yageo                      | CC0805ZRY5V9BB104     | Digi-Key    | 311-1361-1-ND       | \$ 0.10   | \$ 0.10   |
|  | 1        | C9                         | Humidity Sensor Decoupling Cap      | Capacitor    | CAP CER 0.1UF 50V Y5V 0805                            | SMD           | 0805            | 0.1uF      |                            |                       |             |                     | \$ 0.10   | \$ 0.10   |
|  | 2        | C14, C15                   | Pressure Sensor Decoupling Cap      | Capacitor    | CAP CER 0.1UF 50V Y5V 0805                            | SMD           | 0805            | 0.1uF      |                            |                       |             |                     | \$ 0.10   | \$ 0.20   |
|  | 1        | C16                        | Solar Irradiance Decoupling Cap     | Capacitor    | CAP CER 0.1UF 50V Y5V 0805                            | SMD           | 0805            | 0.1uF      |                            |                       |             |                     | \$ 0.10   | \$ 0.10   |
|  | 1        | C13                        | Humidity Sensor Decoupling Cap      | Capacitor    | CAP CER 0.22UF 50V X7R 0805                           | SMD           | 0805            | 0.22uF     | Yemet                      | C0805C224K5RACTU      | Digi-Key    | 399-3491-1-ND       | \$ 0.14   | \$ 0.14   |
| 12                                     |          |                            |                                     |              |   |               |                 |            |                            |                       |             |                     |           |           |
| 13                                     |          |                            |                                     |              |   |               |                 |            |                            |                       |             |                     |           |           |
| 14                                     | 1        | IC1                        | Solar Panel / Battery Charging Chip | IC Chip      | IC USB/AC BATT CHRGR W/PPM 20QFN                      | SMD           | 20-VQFN         |            | Microchip Tech.            | MCP73871-2CAI/ML      | Digi-Key    | MCP73871-2CAI/ML-ND | \$ 1.79   | \$ 1.79   |
| 15                                     | 1        | ADSI1115_ADC               | Solar Irradiance ADC                | IC Chip      | IC ADC 16-BIT I2C PROGBL 10-MSOP                      | SMD           | 10-VSSOP        |            | Texas Instruments          | ADS1115IDGST          | Digi-Key    | 296-24934-1-ND      | \$ 6.51   | \$ 6.51   |
| 16                                     | 1        | MIC7300_OPAMP              | Solar Irradiance Op-Amp             | IC Chip      | IC OPAMP GP 370KHZ RRO SOT23-5                        | SMD           | SOT23-5         |            | Microchip Tech.            | MIC7300YM5-TR         | Digi-Key    | 576-1319-1-ND       | \$ 0.28   | \$ 0.28   |
| 17                                     |          |                            |                                     |              |   |               |                 |            |                            |                       |             |                     |           |           |
| 18                                     | 1        | BAROMETER                  | Barometer / Pressure Sensor         | IC Sensor    | IC BAROMETER I2C DGTL MINI 8-LGA                      | SMD           | 8-TLGA          |            | Freescalo Semiconductor    | MPL115A2T1            | Digi-Key    | MPL115A2T1CT-ND     | \$ 5.10   | \$ 5.10   |
| 19                                     | 0        | HUMIDITY                   | Humidity Sensor (Old)               | IC Sensor    | SENSOR HUMIDITY SPl 4.5% SMD                          | SMD           | SOIC-8          |            | Honeywell Sensing          | HH6031-000-001        | Digi-Key    | HH6031-000-001TR-ND | \$ -      | \$ -      |
| 20                                     | 1        | HUMIDITY                   | Humidity Sensor (New)               | IC Sensor    | SENSOR HUMIDITY TEMP I2C 4% SMD                       | SMD           | SOIC-8          |            | Honeywell Sensing          | HH6131-021-001        | Digi-Key    | 480-3652-1-ND       | \$ 15.13  | \$ 15.13  |
| 21                                     | 1        | IRRADIANCE_110             | Solar Irradiance (Old)              | IC Sensor    | SELF-POWERED PYRANOMETER                              |               | 3-Pin Wire      |            | Apogee Instruments         | SP-110                | Apogee      | SP-110              | \$ 195.00 | \$ 195.00 |
| 22                                     | 0        | IRRADIANCE_215             | Solar Irradiance (New)              | IC Sensor    | SELF-POWERED PYRANOMETER                              |               | 3-Pin Wire      |            | Apogee Instruments         | SP-215                | Apogee      | SP-215              | \$ 235.00 | \$ -      |
| 23                                     |          |                            |                                     |              |   |               |                 |            |                            |                       |             |                     |           |           |
| 24                                     | 1        | Q2                         | Crystal Oscillator                  | Crystal      | Crystal 8.00MHz 10ppm 19Pf 8 Ohm Through Hole HC49/US | PTH           | HC49/US         | 8.00MHz    | TXC Corp.                  | 9B-8.000MEEJ-B        | Digi-Key    | 887-1233-ND         | \$ 0.48   | \$ 0.48   |
| 25                                     | 1        | U2                         | ATMEGA MCU                          | MCU          | IC MCU 8BIT 32KB FLASH 32QFN                          | SMD           | 32-VQFN         |            | Atmel                      | ATMEGA328P-MU         | Digi-Key    | ATMEGA328P-MU-ND    | \$ 3.58   | \$ 3.58   |
| 26                                     |          |                            |                                     |              |   |               |                 |            |                            |                       |             |                     | \$ -      | \$ -      |
| 27                                     | 2        | R1, R4                     | Solar Irradiance Op-Amp Feedback    | Resistor     | RES SMD 4.7K OHM 5% 1/8W 0805                         | SMD           | 0805            | 4.7k       | Stackpole Electronics Inc. | RMCF0805JT4K70        | Digi-Key    | RMCF0805JT4K70CT-ND | \$ 0.10   | \$ 0.20   |
| 27                                     | 2        | R2, R3                     | Humidity Pull-Up                    | Resistor     | RES SMD 4.7K OHM 5% 1/8W 0805                         | SMD           | 0805            | 4.7k       |                            |                       |             |                     | \$ 0.10   | \$ 0.20   |
| 28                                     | 2        | R5, R12                    | MCU Pull-Up; Solar Charger Resistor | Resistor     | RES SMD 10K OHM 5% 1/8W 0805                          | SMD           | 0805            | 10k        | Stackpole Electronics Inc. | RMCF0805JT10K0        | Digi-Key    | RMCF0805JT10K0CT-ND | \$ 0.10   | \$ 0.20   |
| 29                                     | 1        | R6                         | Solar Charger Resistor              | Resistor     | RES SMD 270K OHM 5% 1/8W 0805                         | SMD           | 0805            | 270k       | Panasonic Electro-Comp.    | ERJ-6GEYJ274V         | Digi-Key    | P270KACT-ND         | \$ 0.10   | \$ 0.10   |
| 30                                     | 2        | R8, R10                    | Solar Charger Resistors             | Resistor     | RES SMD 100K OHM 5% 1/8W 0805                         | SMD           | 0805            | 100k       | Panasonic Electro-Comp.    | ERJ-6GEYJ104V         | Digi-Key    | P100KACT-ND         | \$ 0.10   | \$ 0.20   |
| 31                                     | 1        | R9                         | Solar Charger Resistor              | Resistor     | RES SMD 2K OHM 5% 1/8W 0805                           | SMD           | 0805            | 2k         | Panasonic Electro-Comp.    | ERJ-6GEYJ202V         | Digi-Key    | P2.0KACT-ND         | \$ 0.10   | \$ 0.10   |
| 32                                     | 1        | R11                        | Solar Charger Resistor              | Resistor     | RES SMD 1K OHM 5% 1/8W 0805                           | SMD           | 0805            | 1k         | Panasonic Electro-Comp.    | ERJ-6GEYJ102V         | Digi-Key    | P1.0KACT-ND         | \$ 0.10   | \$ 0.10   |
| 33                                     | 1        | R13                        | Solar Charger Resistor              | Resistor     | RES SMD 150K OHM 5% 1/8W 0805                         | SMD           | 0805            | 150k       | Panasonic Electro-Comp.    | ERJ-6GEYJ154V         | Digi-Key    | P150KACT-ND         | \$ 0.10   | \$ 0.10   |
| 34                                     |          |                            |                                     |              |   |               |                 |            |                            |                       |             |                     |           |           |
| 35                                     | 1        | PANEL                      | Solar Panel 6V 5.6W                 | Solar Panel  | HUGE 6V 5.6W SOLAR PANEL                              | DC JACK       | 3.8mm OD        |            | Adafruit                   | 1525                  | Adafruit    | 1525                | \$ 59.00  | \$ 59.00  |
| 36                                     | 1        | D1                         | Solar Charger Zener Diode           | Diode        | DIODE SCHOTTKY 20V 500MA SOD123                       | SMD           | SOD-123         |            | ON Semiconductor           | MBR0520LT3G           | Digi-Key    | MBR0520LT3GOSCT-ND  | \$ 0.33   | \$ 0.33   |
| 37                                     |          |                            |                                     |              |   |               |                 |            |                            |                       |             |                     |           |           |
| 38                                     | 1        | BATT                       | Li-Po Battery JST Cable Connector   | Connector    | CONN HEADER PH SIDE 2POS 2MM SMD                      | SMD           | 0.079" (2.00mm) | 2-Pin      | JST Sales America Inc.     | S2B-PH-SM4-TB(LF)(SN) | Digi-Key    | 455-1749-1-ND       | \$ 0.56   | \$ 0.56   |

# Cranberry's (V1.0) Power Budget



## Average Component Statistics

- **XBee:** 49.57 mW
  - Idle: 99.9891%, Transmit: 0.0109%
- **Barometer:** 0.02 mW
- **Humidity:** 1.07 mW
- **+3.3V V. Reg. (2x):** 0.58 mW
- **ATMEGA MCU:** 3.96 mW
- **Irradiance ADC:** 0.26 mW
- **Irradiance Op-Amp:** 1.32 mW

## Total System Consumption

- Average Power: 57.36 mW
- Max Power: 75.99 mW

## Li-Po Battery Statistics

- 6600 mAh, 3.7V, 19536 mWh
- 15,600 mAh, 3.7V, 46176 mWh
- Useable Energy: 80.0%

## Run-Time Statistics

- **6600 mAh:**  
(257.1 Hrs) 8 Days, 13.67 Hours
- **15,600 mAh:**  
(486.14 Hrs) 20 Days, 6.14 Hours

# Cranberry's (V1.0) Power Budget



$$P = V * I$$

## Cranberry Board (V1.0) Power Budget

| 3.3 Volt Module<br>Device Name             | Datasheet Values |                           |                            | Calculated Values      |                                |                                      | XBee Characteristics |           |
|--|------------------|---------------------------|----------------------------|------------------------|--------------------------------|--------------------------------------|----------------------|-----------|
|  | Idle (mA)        | Typical Current Draw (mA) | Max Current Draw (mA)      | Avg. Current Draw (mA) | Avg. Power Consumed (mW)       | Max Power Consumed (mW)              | Transmit Time        | Idle Time |
| XBee Transmit                              | 15.00            | 205.00                    | 220.00                     | 15.02                  | 49.57                          | 49.57                                | 0.0109%              | 99.9891%  |
| XBee Receive                               |                  |                           |                            | 0.00                   | 0.00                           | 0.00                                 |                      |           |
| Barometer                                  | 0.01             | 0.01                      | 0.01                       | 0.01                   | 0.02                           | 0.02                                 |                      |           |
| Humidity (HIH6031)                         | 0.00             | 0.65                      | 1.00                       | 0.33                   | 1.07                           | 3.30                                 |                      |           |
| V. Reg 3.3V (Main)                         |                  | 0.35                      | 0.90                       | 0.18                   | 0.58                           | 2.97                                 |                      |           |
| V. Reg 3.3V (Xbee)                         |                  | 0.35                      | 0.90                       | 0.18                   | 0.58                           | 2.97                                 |                      |           |
| Atmega 328P MCU                            | 0.70             | 1.70                      | 2.70                       | 1.20                   | 3.96                           | 8.91                                 |                      |           |
| Irradiance ADC                             | 0.01             | 0.15                      | 0.30                       | 0.08                   | 0.26                           | 0.99                                 |                      |           |
| Irradiance Op Amp                          |                  | 0.80                      | 2.20                       | 0.40                   | 1.32                           | 7.26                                 |                      |           |
| <b>Total Current Draw (mA)</b>             | <b>15.72</b>     | <b>209.01</b>             | <b>228.01</b>              | <b>17.38</b>           | <b>57.36</b>                   | <b>75.99</b>                         |                      |           |
| <b>Supply Voltage (V)</b>                  | <b>3.30</b>      | <b>3.30</b>               | <b>3.30</b>                | <b>3.30</b>            | <b>3.30</b>                    | <b>3.30</b>                          |                      |           |
| <b>Total Power Consumption (mW)</b>        | <b>51.86</b>     | <b>689.72</b>             | <b>752.42</b>              | <b>57.36</b>           | <b>57.36</b>                   | <b>75.99</b>                         |                      |           |
| <b>Rechargeable Li-Po Batteries (3.7V)</b> |                  |                           |                            |                        |                                |                                      |                      |           |
| Battery                                    | Voltage (V)      | Current (mAH)             | Useable Energy (%)         |                        |                                |                                      |                      |           |
| 6600 mAH Li-ion 3.7V                       | 3.7              | 6600                      | 80.0%                      |                        |                                |                                      |                      |           |
| 15600 mAH Li-ion 3.7V                      | 3.7              | 15600                     | 80.0%                      |                        |                                |                                      |                      |           |
| <b>Estimated Battery Running Time</b>      |                  |                           |                            |                        |                                |                                      |                      |           |
| Battery                                    | Energy (mWH)     | V. Reg Efficiency (%)     | Max Power Consumption (mW) | Max (Hrs)              | Max w/ V. Reg Efficiency (Hrs) | Max w/ V. Reg Efficiency (Days, Hrs) |                      |           |
| 6600 mAH Li-ion 3.7V                       | 19536            | 80.0%                     | 75.99                      | 257.1                  | 205.67                         | 8 Days, 13.67 Hours                  |                      |           |
| 15600 mAH Li-ion 3.7V                      | 46176            | 80.0%                     | 75.99                      | 607.7                  | 486.14                         | 20 Days, 6.14 Hours                  |                      |           |

## Cranberry Notes and Documentation

Revision: R1.0

- \* Current Draw (mA) and Avg. Power (mW) calculations assume sensors (barometer, etc.) are polling 1/2 of time.
- \* V. Reg current values are taken from datasheet values for loads of Iout = 50mA, because total average system current draw is approximately 57mA for the 3.3V regulator.
- \* Assume XBee leakage currents are negligible ( $\mu A \ll mA$ ).
- \* Assume XBee only operates in transmit/idle mode (i.e. does not receive data from the server).
- \* For XBee Transmit/Idle Time, use given parameters: 82bytes (Transmit Rate = 250 kbps), sent to the server every 3 seconds.

# Inter-Team Collaboration

## ***Apple Team***

- Power Budget Comparisons
- Changes to circuit schematic / layout

## ***XBee Team***


- Pin Connections and soldering practice

## ***Dragon Fruit Team***

- Power Budget Implementation
- Component selection, debugging, schematic and board layout

## ***Firmware and Verification Team***

- Board layout considerations and pin-out connections for programming and debugging



# Remaining Tasks and End-Goals



## ***Cranberry Board (V1.0)***


- Solder MCU and sensor components
- Program MCU and verify proper sensor values

## ***EAGLE and PCB Design (V2.0)***

- Complete remaining parts
- Redesign new board with updated parts / packages

## **Main Deliverable:**

**A working *Cranberry Board (V1.0)* with proper documentation and a redesign for *Cranberry Board (V2.0)*.**





Any Questions?

Cranberry

*Experimental Weatherbox Platform*



Smart Campus Energy Lab (SCEL)

Renewable Energy & Island Sustainability (REIS)

*University of Hawaii at Manoa*

